

TW2605



Iridium® Antenna

Frequency Coverage: Iridium

The TW2605 employs Calian's patented Accutenna® technology in an embedded, passive right-hand circularly polarised antenna for the 1616 MHz to 1626.5 MHz frequency band, certified and specially designed to maximise the performance of Iridium® voice and data modems.

The TW2605 features a high performance dual-feed patch element that provides great axial ratio (3.0 dB max) over the entire Iridium® frequency band, thus signals at the band edges remain truly circular, unlike the response of single-feed antennas.

The TW2605 provides excellent Iridium® signal coverage and comes in a compact circular form factor with a built-in 50 mm diameter ground plane.

Custom tuning, cable length, and connectors are available on request.



Applications

- Iridium® Voice and Data Applications
- Sea & land container tracking
- Law enforcement and public safety
- Fleet management and asset tracking
- Marine & avionics systems
- Law enforcement and public safety

Features

- Custom high-gain 4.25 dBic dual-feed patch
- Great axial ratio, 3.0 dB over full bandwidth
- 15 kV ESD circuit protection
- Small form factor
- Available application specific tuning
- RoHS, REACH and CE compliant

Benefits

- Excellent circular polarized signal transmission
- Industrial temperature range
- Rugged design

About Calian: With global headquarters and manufacturing in Ottawa, Canada, Calian is a leading manufacturer of high-precision antennas and components for Global Navigation Satellite System (GNSS) applications. Calian's mission is to support the needs of a new generation of positioning systems by delivering unprecedented antenna precision at competitive prices. Learn more at www.calian.com

Revision: 202407

Contact us:
info@tallysman.com
T: +1 613 591-3131

Iridium® Antenna

Frequency Coverage: Iridium

Antenna - Measured with a 100 mm ground plane

Technology Dual-feed RHCP ceramic patch

		Gain dBic typ. at Zenith	Axial Ratio dB at Zenith
GNSS			
GPS / QZSS	L1	-	-
	L2	-	-
	L5	-	-
GLONASS	G1	-	-
	G2	-	-
	G3	-	-
Galileo	E1	-	-
	E5A	-	-
	E5B	-	-
	E6	-	-
BeiDou	B1	-	-
	B2b	-	-
	B2a	-	-
	B3	-	-
IRNSS / NavIC	L5	-	-
QZSS	L6	-	-
L-Band Services (1525 MHz - 1559 MHz)		-	-
Satellite Communications			
Iridium		4.25	≤ 3
Globalstar		-	-
Other			
Axial Ratio at 10°	-	Efficiency	-
PC Variation	-		

Mechanicals

Size	49.7 mm (dia.) x 7.1 mm (h.)
Weight	38 g
Radome	-
Mount	-
Available Connectors	Please refer to ordering guide

Environmental

Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to 95 °C
Vibration	MIL-STD-810D Method 514.3-1
Shock	Vertical axis: 50 G, other axes: 30 G
Salt Fog	-
IP Rating	-
Compliance	IPC-A-610, FCC, RED / CE Mark, RoHS, REACH

Warranty:


Parts and Labour	1-year standard warranty
------------------	--------------------------

Low Noise Amplifier (LNA) - Measured at 3V and 25°C

Upper Band	Lower Band
Frequency Bandwidth	
1616 - 1626 MHz	-
Out-of-band Rejection	
-	-

Architecture	Passive
Gain	-
Noise Figure	-
VSWR	< 1.5:1 typ., 1.8:1 max
Supply Voltage Range	-
Supply Current	-
ESD Circuit Protection	-
P 1dB Output	-
Group Delay	-
PCO	-

Mechanical Diagram - Units in 'mm'

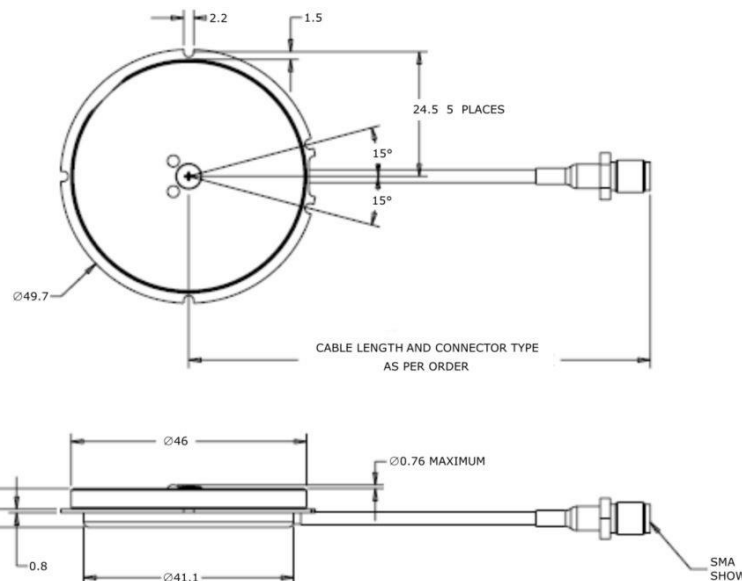

Ordering Information

Part Number 33-2605-xx-zzzz

Where xx = type of connector | zzzz = cable length in mm

Please refer to our **Ordering Guide** to review available radomes and connectors at:
<https://www.tallysman.com/resource/tallysman-ordering-guide/>