

# TW3752AJ



## Anti-Jam High Gain Multi-Constellation Antenna

Frequency Coverage: GPS & QZSS L1 | GALILEO E1 | BEIDOU B1 | GLONASS G1


The TW3752AJ is a precision high-gain GNSS antenna built with Calian's unique Accutenna® technology, providing single-band GPS/QZSS-L1, GLONASS-G1, Galileo-E1, and BeiDou-B1 coverage, including the satellite-based augmentation system (SBAS) available in the region of operation [WAAS (North America), EGNOS (Europe), MSAS (Japan), or GAGAN (India)].

The Tallysman anti-jam feature modifies the radiation pattern of the GNSS antenna such that signals arriving from 10° below and 15° above the horizon are attenuated by 20 dB, while the gain at zenith is increased by 2 dB. Since jamming signals typically originate at low elevations, the TW3752AJ antenna mitigates interference signals below 15°.

Calian's patented Accutenna® technology enables the TW3752AJ antenna to provide a truly circular right-hand polarized signal through the entire bandwidth, thereby enabling superior multipath signal rejection and out-of-band signal rejection. This feature makes the TW3752AJ ideal for professional precision timing and positioning applications.

The TW3752AJ features a precision-tuned, dual-feed patch element. The signals from the two orthogonal feeds are combined in a hybrid combiner, amplified in a wideband LNA, then band-split for narrow filtering and further amplified before recombination at the output. The antenna also has a strong pre-filter to mitigate inter-modulated signal interference from LTE and other cellular bands. The TW3752AJ offers an excellent axial ratio and a tightly grouped phase centre variation.

The TW3752AJ is housed in a permanent-mount metal base with two nickel-coated nuts and an IP67 weather-proof enclosure. Two mounting options are available: an L-bracket (P/N 23-0040-0); or a pipe mount (P/N 23-0065-0).

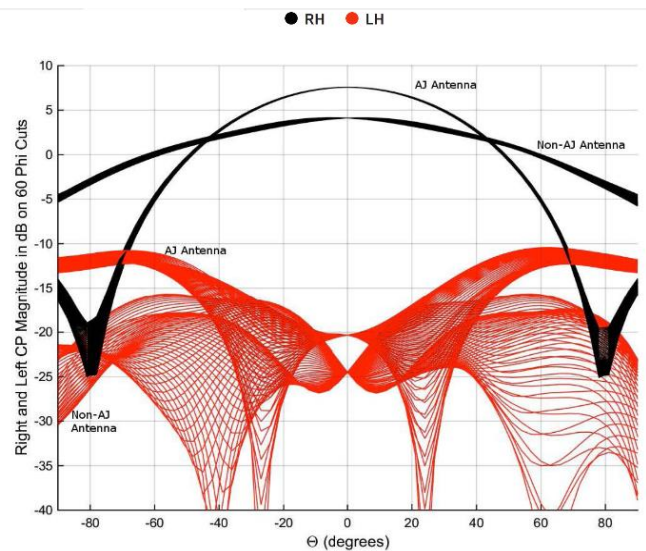

### Applications

- High-accuracy & mission-critical global positioning
- Timing applications
- Law enforcement and public safety

### Features

- Accutenna® technology
- Great axial ratio (2.0 dB typ.)
- Low LNA noise (3.0 dB typ.)
- High-rejection SAW filter
- High-gain LNA (50 dB typ.)
- Low current (30 mA typ.)
- Wide voltage input range (2.5 to 12 VDC)
- ESD circuit protection (15 kV)
- IP67 weather-proof housing
- RoHS and REACH compliant

### Benefits

- Operates under ground-based jamming
- Circular polarisation throughout the full bandwidth
- Superior multipath signal rejection
- Excellent signal-to-noise ratio
- Excellent out-of-band signal rejection
- Increased system accuracy
- Ideal for harsh environments

**About Calian:** With global headquarters and manufacturing in Ottawa, Canada, Calian is a leading manufacturer of high-precision antennas and components for Global Navigation Satellite System (GNSS) applications. Calian's mission is to support the needs of a new generation of positioning systems by delivering unprecedented antenna precision at competitive prices. Learn more at [www.calian.com](http://www.calian.com)

Contact us:  
[info@tallysman.com](mailto:info@tallysman.com)  
T: +1 613 591-3131

# Anti-Jam High Gain Multi-Constellation Antenna

Frequency Coverage: GPS & QZSS L1 | GALILEO E1 | BEIDOU B1 | GLONASS G1

Antenna - Measured with a 100 mm ground plane

Technology Dual-feed RHCP ceramic patch

		Gain dBic typ. at Zenith	Axial Ratio dB at Zenith
GNSS			
GPS / QZSS	L1	6.3	≤ 2
	L2	-	-
	L5	-	-
GLONASS	G1	6.3	≤ 2
	G2	-	-
	G3	-	-
Galileo	E1	6.3	≤ 2
	E5A	-	-
	E5B	-	-
	E6	-	-
BeiDou	B1	6.3	≤ 2
	B2b	-	-
	B2a	-	-
	B3	-	-
IRNSS / NavIC	L5	-	-
QZSS	L6	-	-
L-Band Services (1525 MHz - 1559 MHz)		-	-
Satellite Communications			
Iridium		-	-
Globalstar		-	-
Other			
Axial Ratio at 10°	-	Efficiency	-
PC Variation	-	PCO	-

## Mechanicals

Size	100.0 mm (dia.) x 102 mm (h.)
Weight	370 g
Radome	Radome: EXL9330 , Base: Zamak White Metal
Mount	Through-hole
Available Connectors	Please refer to ordering guide

## Environmental

Operating Temperature	-40 °C to + 85 °C
Storage Temperature	-50 °C to + 95 °C
Vibration	MIL-STD-810D Method 514.3-1
Shock	Vertical axis: 50 G, other axes: 30 G
Salt Fog	MIL-STD-810F Section 509.4
IP Rating	IP67
Compliance	IPC-A-610, FCC, RED, RoHS, REACH

## Warranty


Parts and Labour	3-year standard warranty
------------------	--------------------------

Low Noise Amplifier (LNA) - Measured at 3V and 25°C

Frequency Bandwidth		Out of Band Rejection
Lower Band	-	-
L-Band Corr.	-	> 50 dB @ < 1500 MHz > 70 db @ > 1640 MHz
Upper Band	1559 - 1606 MHz	

Architecture	Pre-filtered
Gain	50 dB typ.
Noise Figure	3.0 dB typ.
VSWR	< 1.5:1 typ., 1.8:1 max.
Supply Voltage Range	2.5 to 16 VDC nominal, up to 50 mV p-p ripple
Supply Current	30 mA typ., 35 mA max.
ESD Circuit Protection	15 kV air discharge
P 1dB Output	11 dBm
Group Delay	17 ns (L1), 1 ns (G1)

## Mechanical Diagram

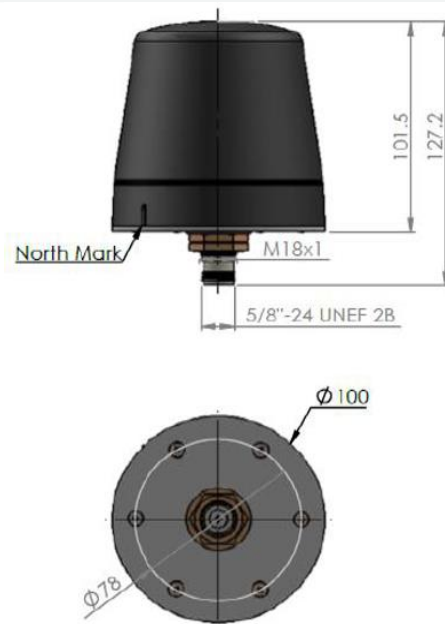

## Ordering Information

Part Number 33-3752AJ-xx-y-zzzz

where xx = connector type, y = w-White Radome, G-Grey Radome, and zzzz = cable length in mm

Please refer to our **Ordering Guide** to review available radomes and connectors at: <https://www.tallysman.com/resource/tallysman-ordering-guide/>