

# TW3152



## High Gain GPS-L1 Antenna

Frequency Coverage: GPS L1

The TW3152 is a high-gain GPS antenna specifically designed for timing applications in high density cell / telecommunications tower applications where high levels of near-out-of-band interfering signals can be expected. This antenna features a 50 dB LNA gain to handle long cable runs often associated with installation on telecommunications towers.

The TW3152 covers the GPS-L1 and SBAS (WAAS, EGNOS & MSAS) frequency band and employs Calian's patented Accutenna® technology to provide excellent cross polarization rejection and greatly enhanced multipath rejection.

The TW3152 features a four (4) stage dual filtered LNA, while the TW3152 includes an additional SAW pre-filter to provide exceptional rejection of close out-of-band signals and additional protection against saturation by high-level subharmonic and L-Band signals.

The TW3152 housing has a permanent-mount, IP69K compliant metal base, and an extended temperature range plastic radome, and is specifically designed to withstand the most challenging environmental conditions.



### Applications

- Timing systems
- Long cable runs

### Features

- Dual-feed Patch Antenna
- Low Loss SAW Pre-Filter
- Great axial ratio: 1 dB typ.
- Triple High-rejection SAW filter
- High-gain LNA: 50 dB typ.
- Low current: 25 mA typ.
- Wide voltage input range: 2.7 to 26 VDC
- IP69K weatherproof housing

### Benefits

- Great out-of-band rejection
- Excellent multipath rejection
- Excellent circular polarisation
- Excellent signal-to-noise ratio
- Increased system accuracy
- Ideal for harsh environments
- CE RED, RoHS, and REACH compliant

**About Calian:** With global headquarters and manufacturing in Ottawa, Canada, Calian is a leading manufacturer of high-precision antennas and components for Global Navigation Satellite System (GNSS) applications. Calian's mission is to support the needs of a new generation of positioning systems by delivering unprecedented antenna precision at competitive prices. Learn more at [www.calian.com](http://www.calian.com)

Revision: 202407

Contact us:  
[info@tallysman.com](mailto:info@tallysman.com)  
T: +1 613 591-3131

# High Gain GPS-L1 Antenna

Frequency Coverage: GPS L1

Antenna - Measured with a 100 mm ground plane

Technology Dual-feed RHCP ceramic patch

		Gain	Axial Ratio
		dBic typ. at Zenith	dB at Zenith
GNSS			
GPS / QZSS	L1	4.5	$\leq 1$
	L2	-	-
	L5	-	-
GLONASS	G1	-	-
	G2	-	-
	G3	-	-
Galileo	E1	-	-
	E5A	-	-
	E5B	-	-
	E6	-	-
BeiDou	B1	-	-
	B2b	-	-
	B2a	-	-
	B3	-	-
IRNSS / NavIC	L5	-	-
QZSS	L6	-	-
L-Band Services (1539 MHz - 1559 MHz)		-	-
Satellite Communications			
Iridium		-	-
Globalstar		-	-
Other			
Axial Ratio at 10°		-	Efficiency
PCV $\Phi > 15^\circ$		-	PCO

## Mechanicals

Size	66.5 mm (dia.) x 21 mm (h.)
Weight	150 g
Radome	LEXAN™ EXL9330, Base: Zamac Metal
Mount	Through-hole (100 mm ground plane provided)
Available Connectors	Please refer to ordering guide

## Environmental

Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +95 °C
Vibration	MIL-STD-810-E - Test Method 514.5
Shock	MIL-STD-810-G - Test Method 516.6
Salt Fog	MIL-STD-810-F - Test Method 509.5
Other Tests	Hail, Humidity, Dust, Rain, Sand, Solar
IP Rating	IP69K
Compliance	IPC-A-610, FCC, CE RED, RoHS, REACH

## Warranty


Parts and Labour	3-year standard warranty
------------------	--------------------------

Low Noise Amplifier (LNA) - Measured at 3V and 25°C

Frequency Bandwidth	Out of Band Rejection
Lower Band	-
L-Band Corr.	-
Upper Band	1575.42 MHz $\pm$ 10 MHz
	> 80 dB @ < 1545 MHz > 60 dB @ > 1610 MHz

Architecture	Pre-filtered
Gain	48 dB min.
Noise Figure	3.5 dB typ.
VSWR	< 1.5:1 typ., 1.8:1 max.
Supply Voltage Range	2.5 to 16 VDC nominal, up to 50mV p-p ripple
Supply Current	25 mA typ., 30 mA max
ESD Circuit Protection	15 kV air discharge
P 1dB Output	-
Group Delay	140 ns typ.

Mechanical Diagram - Units in 'mm' or 'inches' where specified

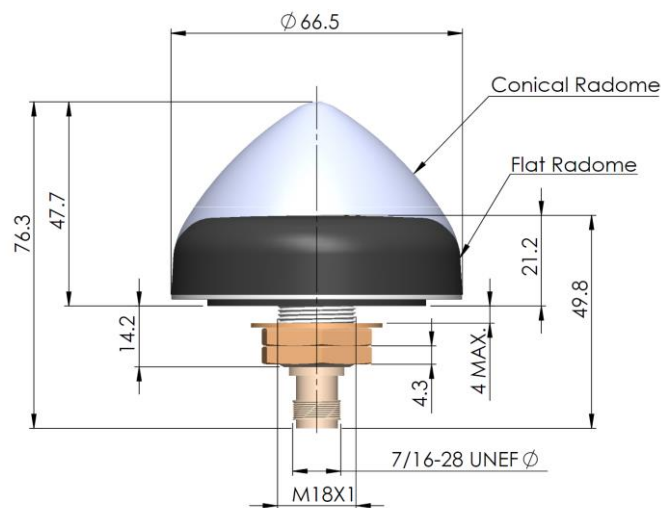

## Ordering Information

Part Number 33-3152-xx-yy-zzzz

Where xx = connector type, yy = shape and colour of radome and zzzz = cable length in mm (where applicable)

Please refer to our **Ordering Guide** to review available radomes and connectors at:  
<https://www.tallysman.com/resource/tallysman-ordering-guide/>