

# TW164B



## TW164B 1-to-4 Port Smart Power GNSS Signal Splitter

Frequency Coverage: Full GNSS Spectrum

The Calian TW164B is a professional-grade full GNSS band signal splitter that connects one antenna up to four receivers, and supports GPS/QZSS-L1/L2/L5, QZSS-L6, GLONASS-G1/G2/G3, BeiDou-B1/B2/B2a/B3, Galileo-E1/E5a/E5b/E6, NavIC-L5, and L-Band correction services. This model has all four receiver ports in-line on the backside of the splitter, with the antenna port located on the frontside.

GNSS has become a critical component in safety, security, timing, and infrastructure applications, all of which require very high availability. As a result, resilient fault-tolerant components are essential to avoid service interruptions.

The design of first-generation GNSS signal splitters suffered from a single point of failure: only one attached receiver powered the splitter and the antenna. If this receiver failed or was unplugged, all attached receivers also failed.

Calian's current-generation TW164B Smart Power GNSS signal splitter provides two additional key features:


First, it accepts power from all attached GNSS receivers and selects power from a receiver using the following protocol. Port #1 is given priority if its voltage is within the specified range (3.3 - 12.5 VDC). However, if port #1's receiver is disconnected or if its receiver power goes below the under-voltage or above the over-voltage specification, the TW164B will switch to the next port in numerical order, as long as its power and voltage are within the expected range. The switching and port selection is, therefore, deterministic.

Second, if the antenna fails and does not draw current, the TW164B will provide all connectors with a current draw lower than 1 mA, indicating an antenna fault.

The TW164B offers the best in-class performance in terms of noise figure, isolation, and linearity. In addition, it is packaged in a robust, compact, lightweight, and waterproof (IP67) corrosion-protected aluminum housing.

The TW164B is available with either SMA, TNC or type-N connectors and offers standard gain to compensate for signal-splitting loss.

It is recommended that unused ports should be terminated with a 50 Ohm load.

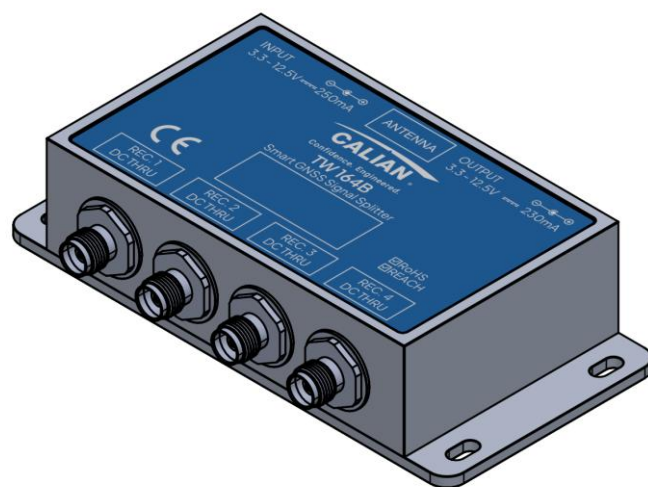

### Applications

- GNSS signal distribution
- GNSS receiver testing
- High-availability applications
- Network and infrastructure timing

### Features

- Accepts power from all attached receivers
- Automatic switching on failure of a receiver
- Antenna failure detection/indication
- Rugged military-grade aluminum enclosure
- Amplified to compensate for splitting loss
- Very low noise figure
- IP67 compliant

### Benefits

- Allows up-to 4 receivers to share one antenna
- Fits in-line with antenna cable
- Robust package
- Ideal for harsh environments

**About Calian:** With global headquarters and manufacturing in Ottawa, Canada, Calian is a leading manufacturer of high-precision antennas and components for Global Navigation Satellite System (GNSS) applications. Calian's mission is to support the needs of a new generation of positioning systems by delivering unprecedented antenna precision at competitive prices. Learn more at [www.calian.com/gnss](http://www.calian.com/gnss)

Revision: 202507

Contact us:  
[info.gnss@calian.com](mailto:info.gnss@calian.com)  
T: +1 613 591-3131

# TW164B 1-to-4 Port Smart Power GNSS Signal Splitter

Frequency Coverage: Full GNSS Spectrum

## Electrical Specifications

| Parameter                     | Conditions / Description                | Minimum | Typical       | Maximum       | Units       |
|-------------------------------|-----------------------------------------|---------|---------------|---------------|-------------|
| Frequency Range               | Bandwidth supported                     | 1100    | -             | 1700          | MHz         |
| Gain                          | Measured within range: -40 °C to 85 °C  | -1.0    | 0             | 1.0           | dB          |
| Impedance                     | -                                       | -       | 50            | -             | $\Omega$    |
| Noise Figure                  | All Receiver Ports                      | -       | 3.6           | 4             | dB          |
| Output Isolation              | -                                       | 42      | -             | -             | dB          |
| Input/Output SWR              | -                                       | -       | 1.3:1   1.1:1 | 1.5:1   1.2:1 | ratio       |
| Gain Compression Point (P1dB) | Gain of 0 dB                            | -20     | -17           | -14           | dBm         |
| 3rd Order Intercept (IIP3)    | Gain of 0 dB                            | -10     | -7            | -4            | dBm         |
| RF Input (Damage Threshold)   | Maximum RF Input without damage         | -       | -             | 5             | dBm         |
| Amplitude Balance             | Between Ports                           | -       | 0.1           | 0.5           | dB          |
| Phase Balance                 | Between Ports                           | -       | 2             | 5             | degrees (°) |
| DC Input Range                | DC input on any receiver port           | 3.3     | -             | 12.5          | VDC         |
| Receiver Over-Voltage         | -                                       | 12.7    | 14.9          | 16.9          | VDC         |
| Receiver Under-Voltage        | -                                       | 2.3     | 2.5           | 2.8           | VDC         |
| Splitter Current              | Current consumed by splitter            | -       | 15            | 25            | mA          |
| Antenna Through Current       | Maximum current provided to the antenna | -       | -             | 230           | mA          |
| Group Delay Variation         | Antenna to Ports                        | 1       | 1.4           | 2             | ns          |
|                               | Adjacent Ports                          | 0       | 0.3           | 0.5           | ns          |
|                               | Opposite Ports                          | 0       | 0.5           | 1             | ns          |

## Mechanicals

|            |                                             |
|------------|---------------------------------------------|
| Size       | 158.0 mm (l.) x 76.5 mm (w.) x 37.5 mm (h.) |
| Weight     | 570 g (SMA), 580 g (TNC), 590 g (type-N)    |
| Connectors | SMA, TNC or type-N (all female)             |
| Enclosure  | Aluminum 6061-T6                            |


## Environmental

|                       |                                                                                               |
|-----------------------|-----------------------------------------------------------------------------------------------|
| Operating Temperature | -40 °C to 85 °C                                                                               |
| Storage Temperature   | -55 °C to 95 °C                                                                               |
| Vibration             | -                                                                                             |
| Shock                 | -                                                                                             |
| Salt Fog              | -                                                                                             |
| IP Rating             | IP67                                                                                          |
| Compliance            | RoHS, REACH and WEEE,<br>EN60950-1, RED / CE Certified,<br>FCC Part 15B and R&TTE equivalent. |

## Warranty

|                  |                          |
|------------------|--------------------------|
| Parts and Labour | 3-year standard warranty |
|------------------|--------------------------|

## Mechanical Diagram

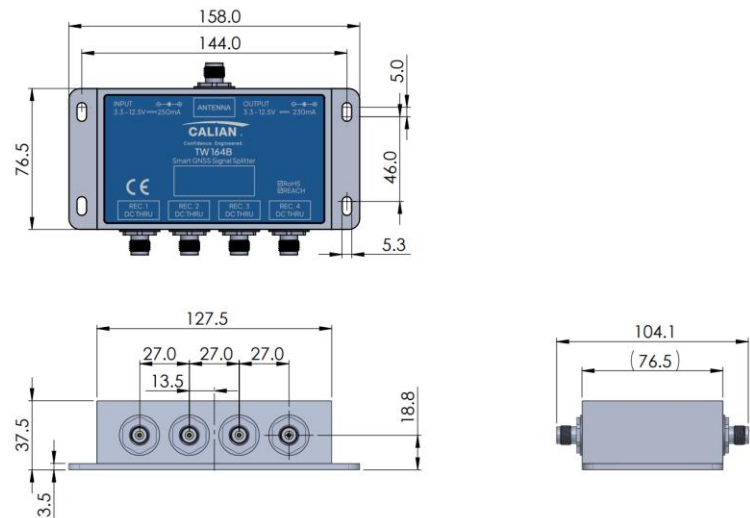

## Ordering Information

Part Number **32-0164B-xx**

where xx = connector:

14 = type-N (female), 01 = TNC (female), 20 = SMA (female)

Please refer to our **Ordering Guide** to review available radomes and connectors at:  
<https://at.calian.com/gnss/information-support/part-number-ordering-guide/>